ULTRA SILENCE FS O



Rw up to 50 dB



Modern design



Fire resistance EI30/EW30 and EI60/EW60



ULTRA SILENCE FS is a double-glazed fire-resistant system with an elegant design. With a height of 30 mm and a width of 100 mm, the profiles of this system provide stability while remaining visually light. ULTRA SILENCE FS also offers excellent acoustic performance of up to 50 dB. Walls in this system improve working or resting conditions by muffling sounds and soundproofing the space. The fire resistance of the ULTRA SILENCE FS system in the EI30/EW30 and EI60/EW60 classes ensures safety, while concealed seals improve the aesthetics of the profiles. The system combines precision craftsmanship, modern design and stability to develop a reliable solution for offices and commercial spaces.

Double-glazed system

Structural profiles 30 mm high and 100 mm wide in any colour from the RAL palette

Maximum height 3200 mm

Fire resistance EI30/EW30 and EI60/EW60

Aesthetic and minimalist design


Invisible gaskets

National Technical Assessment: ITB-KOT-2019/0978

European Technical Assessment: ETA- 24/0699


System Ultra Silence FS Vertical



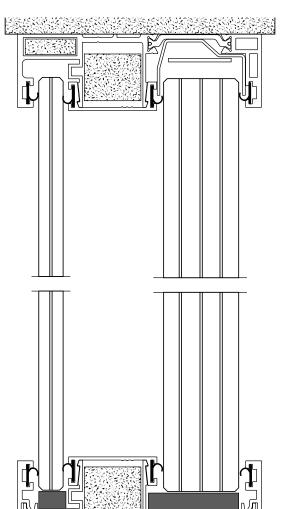

System Ultra Silence FS

Horizontal

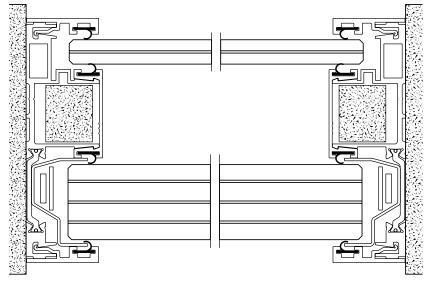

System Ultra Silence FS (EI30) Type of filling

Glazing	AGC Pyrobel	AGC Pyrobel	AGC Pyrobel
	16VL	16VL	16VL
	+ VSG 55.1	+ VSG 66.2Si	+ VSG 88.2Si
Acoustic insulation Rw	44 dB	48dB	50dB

System Ultra Silence FS (EI60) *Type of filling*

Glazing	AGC Pyrobel	AGC Pyrobel	Vetrotech	Vetrotech
	P25VL +	P25VL +	CS60	CS60
	VSG 55.1	VSG 66.2Si	+ VSG 55.1	+ VSG 66.2Si
Acoustic insulation Rw	47 dB	50dB	46 dB	48 dB