

# System PURE



Rw up to 39 dB



Easy and quick  
to install



100% transparency  
effect



**PURE is Vitrintec's flagship product, dedicated to the spaces where high aesthetic standards and functionality are required.** It is an interior glazed wall system designed to achieve maximum translucency. The aluminium profiles, which have a depth of 22 mm and a height of 25 mm or 30 mm, provide a subtle appearance while maintaining structural stability. The use of concealed seals serves to reinforce this minimalist visual effect. The system is completed by the addition of laminated or toughened safety glass, available in thicknesses ranging from 10 mm to 12 mm. The PURE system allows for the installation of glass walls up to a height of 3,500 mm, with sound insulation levels ranging from Rw 33 dB to Rw 39 dB.

Single-glazed system

Structural profiles 25 or 30 mm high and 22 mm wide in any RAL colour

Maximum height 3500 mm


Aesthetic and minimalist design

Invisible gaskets


National Technical Assessment: ITB-KOT-2021/0816

European Technical Assessment: ETA- 21/0430


System Pure  
Vertical

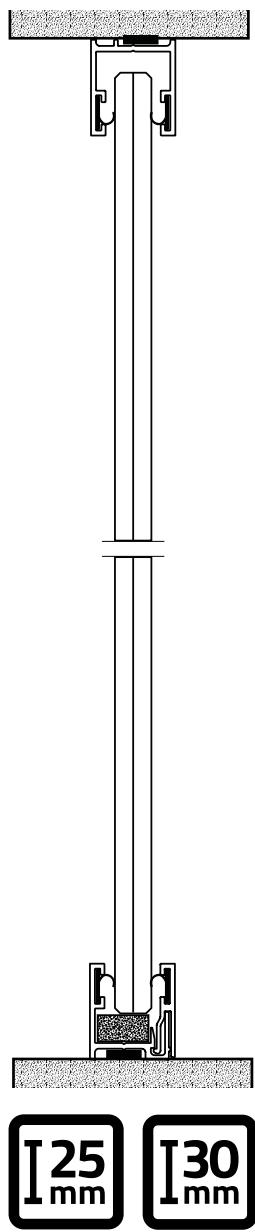

System Pure  
Horizontal

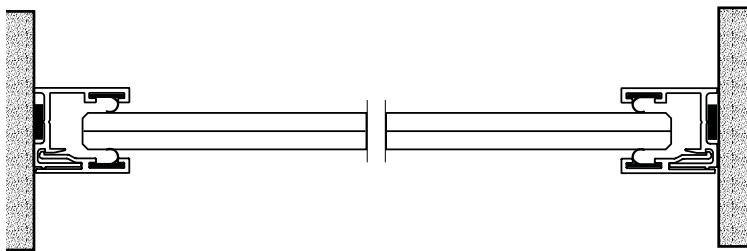

System Pure with doorframe  
Horizontal

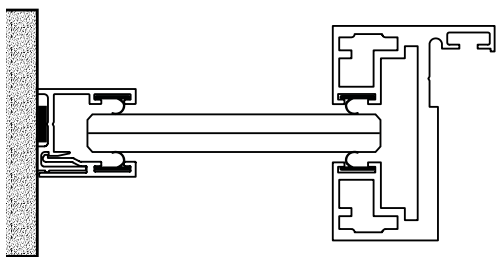

System Pure  
Type of filling

Glazing	VSG 55.1	VSG 55.2Si	VSG 66.1	VSG 66.2Si	VSG 66.2Si + Acoustic insert
Acoustic insulation Rw	33dB	36dB	36dB	38dB	39dB